

API 600 Carbon Steel Swing Check CL 150




Design	ASME B16 .34 / BS1868
Face to Face	ASME B16.10
End to End	ASME B16.10
Flange	ASME B16
BW End	ASME B16 .25
Test	API 598
Special	NACE MR-01-75

Bolted Cover
Swing type disc
Type 1 Standard 2" - 12"
Type 2 Standard 14" - 24"
6" & Larger with eyebolt
By-pass on request
Lever & weight option available on request

Item.	Part Name	Material
1	Body	ASTM A216 GR. WCB
2	Seat Ring	ASTM A 105 + Stellite Faced ASTM
3	Disc	A216 GR. WCB+13Cr Faced ASTM
4	Disc Washer	A276 Type 410
5	Disc Nut Pin	Stainless Steel
6	Disc Nut	Stainless Steel
7	Hinge	ASTM A216 GR. WCB
8	Hinge Pin	ASTM A 182 GR. F6
9	Bearing Bracket	ASTM A216 GR. WCB
10	Spring Washer	Carbon Steel
11	Hex. Bolt	Carbon Steel
12	Gasket	Soft Iron+ Graphite
13	Cover Bolt	ASTM A 193 GR. B7
14	Cover Bolt Nut	ASTM A 194 GR. 2H
15	Cover	ASTM A216 GR. WCB
16	Eye Bolt	Carbon Steel
17	Plug	Carbon Steel



17
Type 2: Hinge Pin Passing Through Body and Sealed By Plug

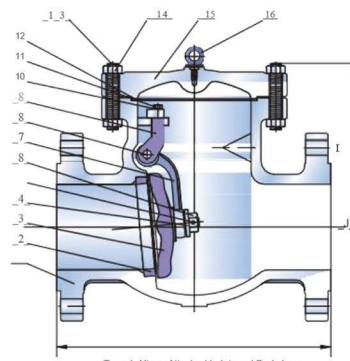

Type 1: Hinge Attached to Internal Body Lug



SI ZE	inches	2"	2.5"	3"	4"	6"	8"	10"	12"	14"	16"	18"	20"	24"
	mm	so	65	80	100	150	200	250	300	350	400	450	500	600
L/ L1	inches	8.00	8.50	9.50	11.50	14.00	19.50	24.50	27.50	31.00	34.00	38.50	38.50	51.00
	mm	203	216	241	292	356	495	622	699	787	864	978	978	1295
L2	inches	8.50	9.00	10.0	12.00	14.50	20.00	25.00	28.00	31.50	34.50	39.00	39.00	51.50
	mm	216	229	254	305	368	508	635	711	800	876	991	991	1308
H	inches	6.10	6.70	7.09	8.66	10.55	12.20	14.57	16.73	18.70	20.67	22.83	24.72	34.72
	mm	155	170	180	220	268	310	370	425	475	525	580	628	882
Weight R F	kg	19	26	29	46	77	163	220	366	428	555	775	835	1180

jhb@valvespec.co.za
+27 11 397 6922

dbn@valvespec.co.za
+27 31 569 6325

