


Brass-Swing-Type-PN16



Specifications
Body in Brass
O-ring of the hexagonal plug in NBR
Washer of the inspection plug in NBR
Plate in Brass
Minimum and Maximum working temperature: 0°C, 90°C
Threads: ISO228 (equivalent to DIN EN ISO 228 and BS EN ISO 228)
Available 3/8" through 2" with NBR Seal 3/8" through 4" with metal seal

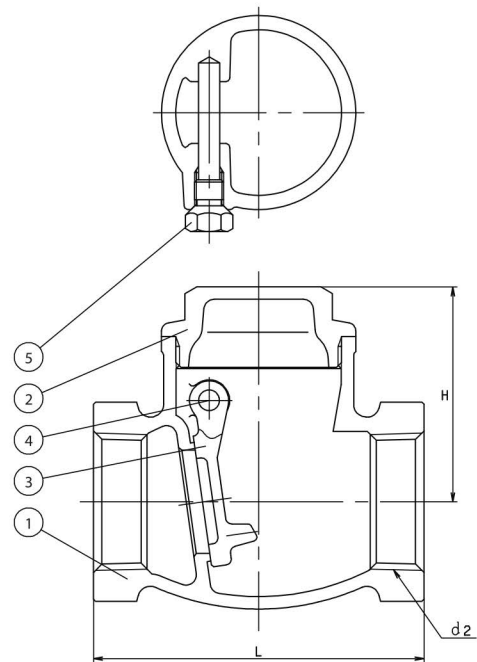

Dimensions (in mm)										
Size										
DN	10	15	20	25	32	40	50	65	80	65
L(mm)	43	43	52	62	72	81	94	119	134	169
H(mm)	50	50	59.2	68	77	88	100	128	148	185
Working pressure kg/cm ² bar	12	12	12	12	10	10	10	8	8	8
	170	170	170	170	140	140	140	110	110	110

Materials of Construction		
Number	Description	Materials
1	Body	Cast Brass CW617N
2	Bonnet	Cast Brass CW617N
3	Disc	Cast Brass CW617N
4	Hinge Pin	Forged Brass B16
5	Plug	Brass Rod B16