

DIN 3202 Carbon Steel Bellows PN40




Design Specifications: Fig. 135-112	
VS Cast Steel Bellow Seal Globe Steam Stop Valve PN40	
Design Specification: EN 13709	
Face to Face Dimensions: EN558-1G1	
Flange end Dimensions: EN1092-1	
Test Conforms to EN 12266-1	
Flanged ends as per DIN 2533 (PN 16) for valves up to 150 mm	
Flanged ends as per DIN 2533 (PN 10) for valves up to 200 mm	
Valve	
Construction and testing as per Din 86251/BS:5152	

Temperature Range:
-29C ~ +425C (1.0619N) Cast Steel
-196C ~ +600C (1.4408) St. Steel

Design Specifications		
Valve size	150mm & below	200mm
Rating	PN40	PN16
Body Test Pressure	26kg / cm 2g (Hyd.)	17kg / cm 2g (Hyd.)
Seat Test Pressure	16kg / cm 2g (Hyd.)	10kg / cm 2g (Hyd.)
Backseat Pressure	16kg / cm 2g (Hyd.)	10kg / cm 2g (Hyd.)

Valve Dimensions (mm)			
Nominal Size	L	H (Open)	HW Dia.
15	130	220	100
20	150	220	100
25	160	230	100
32	180	260	125
40	200	270	160
50	230	290	160
65	290	340	200
80	310	400	200
100	350	450	250
125	400	500	250
150	480	550	315
200	600	600	400
		Maximum	

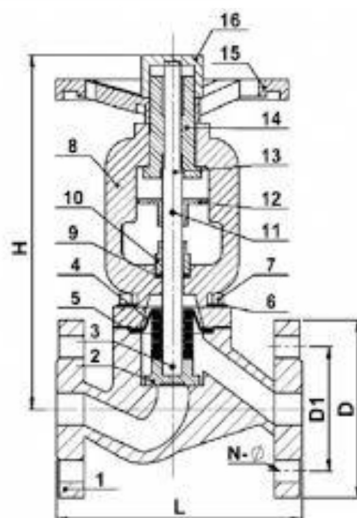

Components	Material	Material Specification
Body, Bonnet, Valve Disc, Gland & Handwheel	Carbon or 316 St. Steel	1.0619/14409
Body Seat Ring, Valve Disc Ring, Spindle, Yoke Bush & Check Nut	Stainless Steel	AISI 410
Gasket	Comp. Asbestos Fibre	15:2712 Gr .C
Gland Packing	Graphited Asbestos	
Fasteners	Mild Steel/316SS	15:226/316SS

jhb@valvespec.co.za
+27 11 397 6922

dbn@valvespec.co.za
+27 31 569 6325

