


# API 600 Cast Steel Gate Valve Rising Stem Class 150



Design	ASME B16.34 / AP1600
Face to Face	ASME B16.34
End to End	ASME B16.34
End to Flange	ASME B16.34 / B16.47
BW End	ASME B16.34
Test	API 598
Special	NACE MFR-OI -75

OS & Y, Rising Stem
Bolted Bonnet
Flexible Wedge (2" Solid)
Extended Bonnet for Cryogenic Services
By Pass on Request
Locking Device Optional

Item	Part Name	Material
1	Body	ASTM A216 GR.WCB
2	Seat Ring	ASTM A105+Stellite Faced
3	Disc	ASTM A216 GR.WCB + 13Cr Faced
4	Stem	ASTM A182 GR..F6
5	Gasket	Soft Iron+Graphite
6	Bonnet	ASTM A216 GR.WCB
7	Bonnet Bolt Nuts	ASTM A194 GR.2H
8	Bonnet Bolts	ASTM A193 GR. B72H
9	Back Seat Brushing	ASTM A276 Type 410
10	Stem Packing	Braided Graphite & Die formed Graphite Ring
11	Eye Bolt Pins	Carbon Steel
12	Gland Eye Bolts	ASTM A307 GR. B
13	Gland	ASTM A276 Type 410
14	Gland Flange	ASTM A216 GR.WCB
15	Eye Bolt Nuts	ASTM A194 GR.2H
156	Grease Nipple	Carbon Steel
17	Stem Nut	ASTM A439 GR. D-2
18	Retaining Nut	Carbon Steel
19	Hand Wheel	Ductile Iron
20	Hand Wheel Nut	Carbon Steel
21	Screw	Carbon Steel
22	Yoke	ASTM A216 GR.WCB
23	Yoke Pan Bolt Nuts	ASTM A194 GR.2H
24	Yoke Pan Bolts	ASTM A193 GR. B72H
25	Bearing	Steel

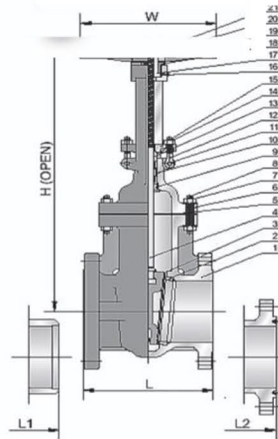

Size	In mm	2"	2.5"	3"	4"	6"	8"	10"	12"	14"	16"	18"	20"	24"	28"	30"	32"	36"
		50	65	80	100	150	200	250	300	350	400	450	500	600	700	750	800	900
L-(RF)	In	7.00	7.50	8.00	9.00	10.5	11.5	13.0	14.0	15.0	16.0	17.0	18.0	20.0	24.0	24.0	28.00	28.0
	mm	178	191	203	229	267	292	330	356	381	406	432	457	508	610	610	711	711
L1-(BW)	In	8.50	9.50	11.12	12.00	16.50	18.00	19.75	22.50	24.00	26.00	28.00	32.00	36.00	36.00	36.00	38.00	40.00
	mm	216	241	283	305	403	419	457	502	572	610	660	711	819	914	914	965	1016
L2-(RTJ)	In	7.50	8.00	8.50	9.50	11.0	12.0	13.50	14.50	15.50	16.50	17.50	18.50	20.50				
	mm	191	203	216	241	279	305	343	368	394	419	445	470	521				
H	In	16.31	17.28	19.69	23.43	30.59	38.39	45.67	54.72	61.22	71.30	82.80	90.55	102.72	130.98	141.97	145.98	154.49
	mm	389	439	500	595	777	975	1160	1390	1555	1811	2103	2300	2609	332.7	3606	3708	3924
W	In	8	8	10	10	14	14	16	18	22	24	25	27	30	24	24	24	24
	mm	200	200	250	250	350	350	400	450	560	600	640	680	760	610	610	610	610
Weight	KG	24	35	37	64	122	172	232	391	644	834	1051	1226	1910	3010	3460	2490	4990

jhb@valvespec.co.za  
+27 11 397 6922

dbn@valvespec.co.za  
+27 31 569 6325

